



■ Main Truck Specifications

		CTB GROUP						
		FD45T	FD50TS	FD50TF				
UJ ^ ö ö ö } •	1	Á ã ~ -ãç !^						
	2	T [á^						
	3	Áí ãã/ãç ããã	\ *	4500	5000	5000		
	4	Áí ãã/ãç ç!	{ {	600	500	600		
	5	Áí [, ^!Á) ã						
	6	Áí] ^!ãç !Á^ ^						
	7	Áí ã^Áç] ^	Áí [) ç!Á^ ã					
	8	Áí @^!•	Áí [) ç!Á^ ã					
Öã ^ } • ã }	9	Áí ãã/ãç * Á@ã @Á	{ {	3000				
	10	Áí ^ Áç	{ {	140				
	11	Áí ! Áã ÁÁ ÁÁ×W ×T	mm	1220×150×50	1070×150×50	1220×150×60		
	12	Tilt angle Mast forward/backward	deg	6/12				
	13	Overall length(without fork)	mm	3100	3100	3183		
	14	Total width	mm	1485				
	15	Mast height (fork lowering)	mm	2300				
	16	Overall height fork raised(with backrest)	mm	4143				
	17	Height to head guard	mm	2250				
	18	Turning radius(outside)	mm	2780	2780	2865		
	19	Load distance	mm	560				
	20	Right angle stacking aisle(not add load length&clearance)	mm	4585		4670		
Performance	21	Max.travelling	full load	km/h		18		
			no load	km/h		19		
	22	Speed	Lifting	full load	mm/s		410	
				no load	mm/s		430	
	23	Lowering	full load	mm/s		380		
no load			mm/s		340			
24	Max.drawbar pull	Power shift T/M	full/no load	kg		4500/2000		
25	Gradeability at 1.6km/h	Power shift T/M	full/no load	%		25/25		
Weights	26	Truck weight		kg	7230	7230	7830	
	27	Weight distribution	Full load	front axle	kg	10780	10780	11280
				rear axle	kg	1290	1290	1790
			No load	front axle	kg	2780	2780	3330
				rear axle	kg	4450	4450	4500
Chassis & Wheels	28	Tires	Number	front/rear	2/2			
			Model	front	300-15-18PR			
				rear	7.00-12-12PR			
	29	Wheelbase		rear	2000			
	30	Tread	Front	1180				
			Rear	mm	1190			
31	Ground clearance	At lowest point(mast)	mm		100			
		Frame	mm		240			
32	Brake	Service brake	power brake					
		Parking brake	mechanical-hand lever					
Drive Line	33	Battery	Voltage/capacity	V/AH	2-12/80			
	34	Engine	Model		YTO 4108	Mitsubishi S6S	YTO 4108	Mitsubishi S6S
			Rated power	KW/rpm	57/2200	52/2300	57/2200	52/2300
			Rated torque	N-m/rpm	297/1600	248/1700	297/1600	248/1700
			Number of cylinder		4	6	4	6
		Displacement	L	4.578	4.996	4.578	4.996	
35	Fuel tank capacity	L	80					
36	Transmission	Shift stage (front / rear-type)	Power shift T/M	2-2 power shift T/M				
			Manual shift T/M	2-2 manual shift T/M				
37	Operating pressure	Hydraulic system pressure	kg/cm ²	180				

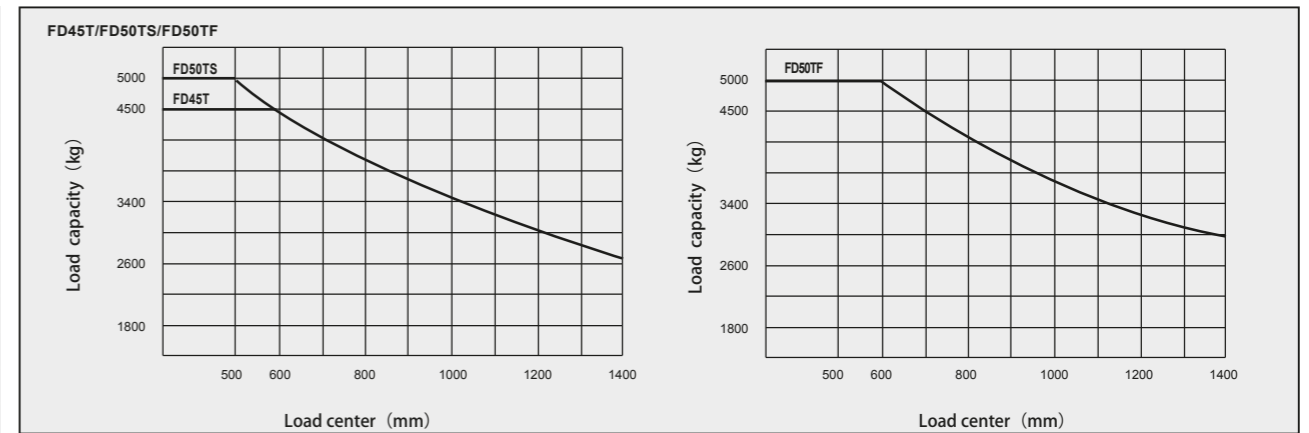

Notes:
 Vertical axis represents load capacity; Horizontal axis shows load center, Load center are determined from front face of the fork. Capacity based on a 1000mm cube load configuration with the center of gravity at the true center of the cube, and standard fork. The load capacity will be reduced while the mast tilt forward or loading with long fork or lifting transformable width of goods. Getting the load capacities at the various load centers timely via the load curve.
 CTB products and specifications change without prior notice.
 CTB forklift truck has equipped with standard safety device.
 CTB is not responsible for the damage occurred by removing its safety device.

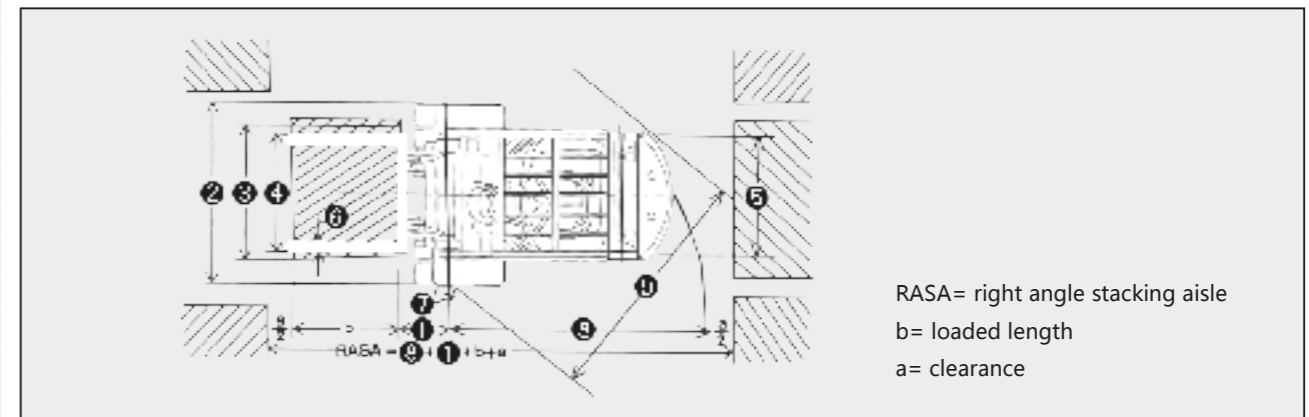

Model	FD45T	FD50TS	FD50TF
	mm	mm	mm
Front Overhang	560	560	560
Total Width	1485	1485	1485
Front Track	1180	1180	1180
Fork Spread(outside)	300~1370	300~1370	300~1370
Rear Track	1190	1190	1190
Fork Width	150	150	150
Turning Radius(inside)	280	280	280
Turning Radius(outside)	2780	2780	2865
Right Angle Turning Aisle	4585	4585	4670

Standard equipments:
 Wide view mast, Cyclone air cleaner, Load one-way valve, Preheat indicator, King Pin, Engin-start switch, Standard backrest, Long-life tires, Overhead guard, Oil and water separator, Power steering, Adjustable steering column, Radiator water tank, Side roller, Standard carriage, Oil temperature cooler, Headlamp and steering indicator lamp, Charge indicator lamp, Hour meter, Oil warning light of engin, Water temperature gauge, Fuel gauge, Reversing light, Electric horn, Neutral-safety switch, Rear mirror, Tools, Reversing Buzzer, General seat.

Options:
 Fire extinguisher, cab, Heater unit, Rear work light, Solid tires, Fireproof silencer, Upper exhaust pipe, Tilt cylinder jacket, Rotating warning light, LPG Conversion device, Pre-filtration air intake device.

Attachments:
 Side shifter, Fork positioned, Carpet boom, Fork extension, Long fork, Flat clamp,Others

Wide view mast VM

Mast Model	Load center			Max. lift height	Mast height				Tilt angle fwd-bwd	Weight		
	600mm	500mm	600mm		fork lowered		fork lift with backrest			FD45T	FD50TS	FD50TF
	FD45T	FD50TS	FD50TF		FD45T/FD50TS	FD50TF	FD45T/FD50TS	FD50TF				
VM300	4500	5000	5000	3000	2300	2390	4143	4318	6 - 12	7230	7230	7830
VM350	4500	5000	5000	3500	2550	2640	4643	4818	6 - 12	7293	7293	7893
VM400	4500	5000	5000	4000	2850	2940	5143	5318	6 - 6	7407	7407	8007
VM450	4500	5000	5000	4500	3100	3190	5643	5818	6 - 6	7471	7471	8071
VM500	4500	4500 + 4600	5000	5000	3350	3440	6143	6318	6 - 6	7534	7534	8134
VM550	4000 + 4400	4000 + 4400	4000 + 4800	5500	3650	3740	6643	6818	3 - 6	7610	7610	8210
VM600	3550 + 4000	3550 + 4000	3350 + 4000	6000	3900	3990	7143	7318	3 - 6	7711	7711	8311

2 Stage free lift mast VFM

Mast Model	Load center			Max. lift height	Mast height				Tilt angle fwd-bwd	Weight		
	600mm	500mm	600mm		fork lowered		fork lift with backrest			FD45T	FD50TS	FD50TF
	FD45T	FD50TS	FD50TF		FD45T/FD50TS	FD50TF	FD45T/FD50TS	FD50TF				
VFM200	4500	5000	5000	2000	1840	1930	3143	3318	6 - 12	7114	7114	7714
VFM250	4500	5000	5000	2500	2090	2180	3643	3818	6 - 12	7180	7180	7780
VFM270	4500	5000	5000	2700	2190	2280	3843	4018	6 - 12	7200	7200	7800
VFM300	4500	5000	5000	3000	2340	2430	4143	4318	6 - 12	7220	7220	7820
VFM350	4500	5000	5000	3500	2590	2680	4643	4818	6 - 12	7280	7280	7880
VFM375	4500	5000	5000	3750	2715	2805	4893	5068	6 - 12	7305	7305	7905
VFM400	4500	5000	5000	4000	2890	2980	5143	5318	6 - 6	7335	7335	7935
VFM450	4500	5000	5000	4500	3140	3230	5643	5818	6 - 6	7380	7380	7980
VFM500	4500	4500 + 4600	5000	5000	3390	3480	6143	6318	6 - 6	7455	7455	8055
VFM550	4000 + 4400	4000 + 4400	4000 + 4800	5500	3690	3780	6643	6818	3 - 6	7505	7505	8105
VFM600	3550 + 4000	3550 + 4000	3350 + 4000	6000	3940	4030	7143	7318	3 - 6	7655	7655	8255

3 Stage free lift mast VFHM

Mast Model	Load center			Max. lift height	Mast height				Tilt angle fwd-bwd	Weight		
	600mm	500mm	600mm		fork lowered		fork lift with backrest			FD45T	FD50TS	FD50TF
	FD45T	FD50TS	FD50TF		FD45T/FD50TS	FD50TF	FD45T/FD50TS	FD50TF				
VFHM360	4500	4900	4800	3600	2029	2119	4743	4918	6 - 12	7580	7580	8180
VFHM400	4500	4900	4800	4000	2163	2253	5143	5318	6 - 12	7640	7640	8240
VFHM435	4500	4700	4800	4350	2279	2369	5493	5668	6 - 6	7420	7420	8460
VFHM480	4500	4600	4800	4800	2463	2553	5943	6118	6 - 6	7500	7500	8540
VFHM500	4400	4000	4700	5000	2529	2619	6143	6318	6 - 6	7560	7560	8600
VFHM540	3300 + 4300	3400 + 4300	3500 + 4600	5400	2663	2753	6543	6718	6 - 6	7720	7720	8760
VFHM550	3200 + 4200	3200 + 4200	3300 + 4500	5500	2696	2786	6643	6818	3 - 6	7740	7740	8780
VFHM580	2800 + 4000	2900 + 4100	2900 + 4300	5800	2829	2919	6943	7118	3 - 6	7820	7820	8860
VFHM600	2400 + 3900	2500 + 4000	2500 + 4200	6000	2896	2986	7143	7318	3 - 6	7880	7880	8920

Note : The mark of * is with double tires.



CTB GROUP

Ctra. Prats de Lluçanes 550
Pol. Ind. La Lanera - Nave 3
08208 Sabadell (Spain)
Tel.: +34 937 168 782
Fax.: +34 937 171 468
www.ctbgroup.es

Distributor:



FD Series 45 ▶ 50

Counter Balanced Forklift



Three Features



1 High safety factor
Compared with the similar forklift its balance weight increases more than 300kg, the stability and overloading are improved much.



2 Powerful brake
Strong and effective power brake system provides the most reliable security. Optimum design and priority system ensure the brake, as well keep the power distribution of othersystems, which makes operation more comfortable.



3 High strength mast
High strength-solder bath mast is forklift's strongest arm. Wide filed of front vision ensures the safety of operation and improves work efficiency.